


## Bela Mini: important assembly note

The Bela Mini cape is intended to be soldered directly to a PocketBeagle (<http://beagleboard.org/pocket>). Make sure you attach it in the correct orientation, as shown, to avoid damage to the board:

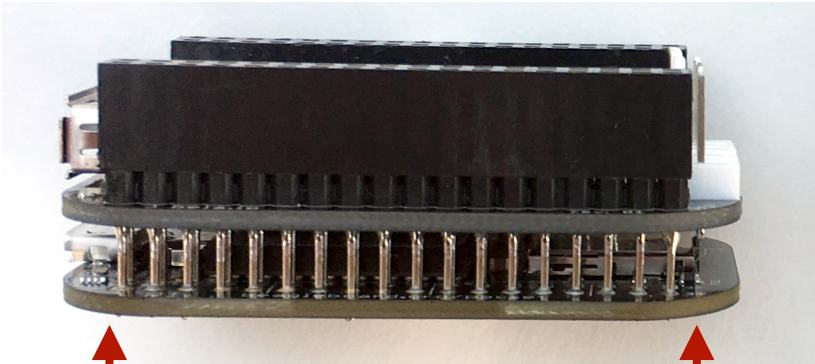

Line up USB ports

Leave space between SD and pins

1. The Bela Mini cape goes on top of the PocketBeagle. The components and connectors on the PocketBeagle should face upward.
2. The USB port on the Bela Mini cape should be above the USB port on the PocketBeagle. The white audio connectors on the Bela Mini cape should be above the SD slot on the PocketBeagle.
3. Leave a space between the top of the PocketBeagle connectors (especially the SD slot) and the pins on the bottom of the Bela Mini cape. A gap of 5mm is about right: this will leave just enough pin to solder on the bottom of the PocketBeagle without needing to trim the excess.

If you've got any questions on assembling the kit, visit us at [forum.bela.io](http://forum.bela.io) or email us at [info@bela.io](mailto:info@bela.io).

- Your friends at Bela HQ