

US Domestic

4" x 6.75" Thermal Label w/ Top Doc Tab

EPL FONTS AND 2D BARCODE

ZPL FONTS AND 2D BARCODE

Doc Tab

Doc Tab

ORIGIN ID: OLVA (123)456-7890
SHIPPER LINE 1 67890123456789012345
SHIPPER LINE 2 67890123456789012345
STREET ADDRESS LINE 1 3456789012345
STREET ADDRESS LINE 2 3456789012345
CITY1234567890123456 ST 12345
UNITED STATES US

SHIP DATE: 24MAR08
ACTWTG: 12.0 LB MAN
SYSTEM#: 1234567/SOFTWARE
DIMMED: 12x34x56 IN
DRY ICE: 123 LB
BILL SENDER

ORIGIN ID: OLVA (123)456-7890
SHIPPER LINE 1 67890123456789012345
SHIPPER LINE 2 67890123456789012345
STREET ADDRESS LINE 1 3456789012345
STREET ADDRESS LINE 2 3456789012345
CITY1234567890123456 ST 12345
UNITED STATES US



SHIP DATE: 24MAR08
ACTWTG: 12.0 LB MAN
SYSTEM#: 1234567/SOFTWARE
DIMMED: 12x34x56 IN
DRY ICE: 123 LB
BILL SENDER

TO RECIPIENT NAME LINE 1 3456789012345
RECIPIENT NAME LINE 2 3456789012345
RECIPIENT STREET ADDRESS LINE 1 345
RECIPIENT STREET ADDRESS LINE 2 345
RECIPIENT CITY 67890 ST 12345


TO RECIPIENT NAME LINE 1 AAAAAAAAAAAAAA
RECIPIENT NAME LINE 2 AAAAAAAAAAAAAA
RECIPIENT STREET ADDRESS LINE 1 AAA
RECIPIENT STREET ADDRESS LINE 2 AAA
RECIPIENT CITY AAAAA, AA 12345

(123)456-7890 REF-5: A MAXIMUM OF 48 ALPHA/NUMERIC CHARACTERS
REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS

(123) 456-7890 REF-5: A MAXIMUM OF 40 ALPHA/NUMERIC CHARACTERS
REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS





EPL PDF417
350 bytes
24 rows
14 data columns




REL#
123456789

CLS050107/22/23



ZPL PDF417
350 bytes
23 rows
14 data columns





REL#
123456789

CLS050107/22/23

9999 of 9999 TUE - 25 MAR AA
TRK# 8059 4197 8632 STANDARD OVERNIGHT
Mstr# 8059 4197 8632 0200 COD IDG ICE ASR
12345
XB MCORT FL-US
MCO

8888 of 8888 TUE - 25 MAR AA
TRK# 8059 4197 8240 STANDARD OVERNIGHT
Mstr# 8059 4197 8240 0200 COD IDG ICE ASR
12345
XB MCORT FL-US
MCO

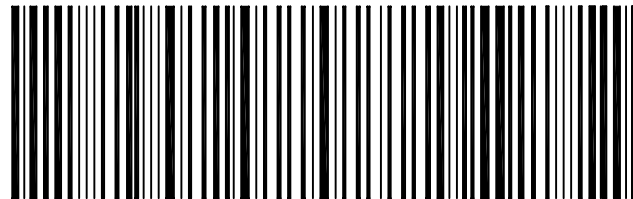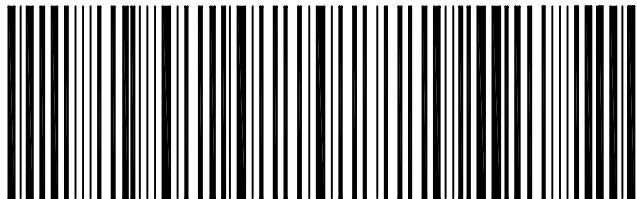

17.625 mm

33.250 mm

36.125 mm

63.500 mm

17.625 mm

33.250 mm

36.125 mm

63.500 mm

150.500 mm

150.500 mm

International - US Origin
4" x 6.75" Thermal Label w/ Top Doc Tab

EPL FONTS AND 2D BARCODE

ZPL FONTS AND 2D BARCODE

Doc Tab

Doc Tab

ORIGIN ID: OLVA (123)456-7890 SHIPPER LINE 1 67890123456789012345 SHIPPER LINE 2 67890123456789012345 STREET ADDRESS LINE 1 3456789012345 STREET ADDRESS LINE 2 3456789012345 CITY1234567890123456 ST 12345 UNITED STATES US	SHIP DATE: 24MAR08 ACTWTG: 12.0 LB MAN SYSTEM#: 1234567/SOFTWARE DIMMED: 12x34x56 IN DRY ICE: 123 LB BILL SENDER NO EEZ 38.37(f)
--	--




ORIGIN ID: OLVA (123)456-7890 SHIPPER LINE 1 67890123456789012345 SHIPPER LINE 2 67890123456789012345 STREET ADDRESS LINE 1 3456789012345 STREET ADDRESS LINE 2 3456789012345 CITY1234567890123456 ST 12345 UNITED STATES US	SHIP DATE: 24MAR08 ACTWTG: 12.0 LB MAN SYSTEM#: 1234567/SOFTWARE DIMMED: 12x34x56 IN DRY ICE: 123 LB BILL SENDER NO EEZ 38.37(f)
--	--




TO RECIPIENT NAME LINE 1 3456789012345
RECIPIENT NAME LINE 2 3456789012345
RECIPIENT STREET ADDRESS LINE 1 345
RECIPIENT STREET ADDRESS LINE 2 345
RECIPIENT CITY 67890 ST 12345-789 (BR)

TO RECIPIENT NAME LINE 1 AAAAAAAAAAAAAA
RECIPIENT NAME LINE 2 AAAAAAAAAAAAAA
RECIPIENT STREET ADDRESS LINE 1 AAA
RECIPIENT STREET ADDRESS LINE 2 AAA
RECIPIENT CITY AAAAA, AA 12345-789 (BR)

(123)456-7890 REF-5: A MAXIMUM OF 48 ALPHA/NUMERIC CHARACTERS
 REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS

(123) 456-7890 REF-5: A MAXIMUM OF 40 ALPHA/NUMERIC CHARACTERS
 REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS

	EPL PDF417 291 bytes 21 rows 14 data columns		FedEx Express  <small>CLS950107/22/23</small>
---	--	---	--

	ZPL PDF417 291 bytes 20 rows 14 data columns		FedEx Express  <small>CLS950107/22/23</small>
---	--	---	--

These commodities, technology, or software were exported from the United States in accordance with the export administration regulations. Diversion contrary to US law is prohibited. REL# 123456789



These commodities, technology, or software were exported from the United States in accordance with the export administration regulations. Diversion contrary to US law is prohibited. REL# 123456789

TUE - 25 MAR AA

9999 of 9999
TRK# 8059 4197 8632 **STANDARD OVERNIGHT**
0200
Mstr# 8059 4197 8632 0200 **COD IDG ICE ASR**
1234567890
XB MCORT FL-US
MCO

TUE - 25 MAR AA

8888 of 8888
TRK# 8059 4197 8240 **STANDARD OVERNIGHT**
0200
Mstr# 8059 4197 8240 0200 **COD IDG ICE ASR**
1234567890
XB MCORT FL-US
MCO

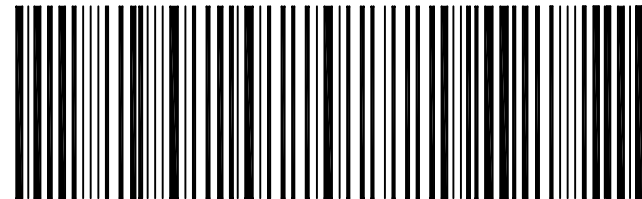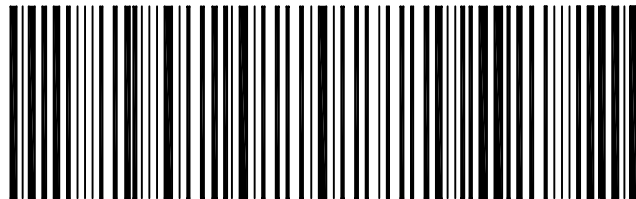

17.625 mm

33.250 mm

36.125 mm

63.500 mm

17.625 mm

33.250 mm

36.125 mm

63.500 mm

150.500 mm

150.500 mm

International - Non US Origin
4" x 6.75" Thermal Label w/ Top Doc Tab

EPL FONTS AND 2D BARCODE

ZPL FONTS AND 2D BARCODE

Doc Tab

Doc Tab

ORIGIN ID: OLVA (123)456-7890 SHIPPER LINE 1 67890123456789012345 SHIPPER LINE 2 67890123456789012345 STREET ADDRESS LINE 1 3456789012345 STREET ADDRESS LINE 2 3456789012345 CITY1234567890123456 ST 12345 UNITED STATES US	SHIP DATE: 24MAR08 ACTWT: 12.0 LB MAN SYSTEM#: 1234567/SOFTWARE DIMMED: 12x34x56 IN DRY ICE: 123 LB BILL SENDER NO EEZ 38.37(f)
--	---

ORIGIN ID: OLVA (123)456-7890 SHIPPER LINE 1 67890123456789012345 SHIPPER LINE 2 67890123456789012345 STREET ADDRESS LINE 1 3456789012345 STREET ADDRESS LINE 2 3456789012345 CITY1234567890123456 ST 12345 UNITED STATES US	SHIP DATE: 24MAR08 ACTWT: 12.0 LB MAN SYSTEM#: 1234567/SOFTWARE DIMMED: 12x34x56 IN DRY ICE: 123 LB BILL SENDER NO EEZ 38.37(f)
--	---

TO RECIPIENT NAME LINE 1 3456789012345
 RECIPIENT NAME LINE 2 3456789012345
 RECIPIENT STREET ADDRESS LINE 1 345
 RECIPIENT STREET ADDRESS LINE 2 345
 RECIPIENT CITY 67890 ST 12345-789 (BR)

TO RECIPIENT NAME LINE 1 AAAAAAAAAAAAAA
 RECIPIENT NAME LINE 2 AAAAAAAAAAAAAA
 RECIPIENT STREET ADDRESS LINE 1 AAA
 RECIPIENT STREET ADDRESS LINE 2 AAA
 RECIPIENT CITY AAAAA, AA 12345-789 (BR)

(123)456-7890 REF-5: A MAXIMUM OF 40 ALPHA/NUMERIC CHARACTERS
 REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS

(123) 456-7890 REF-5: A MAXIMUM OF 40 ALPHA/NUMERIC CHARACTERS
 REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS

EPL PDF417
 446 bytes
 29 rows
 14 data columns

FedEx
 Express

 REL# 123456789



ZPL PDF417
 446 bytes
 27 rows
 14 data columns

FedEx
 Express

 REL# 123456789

9999 of 9999 **TUE - 25 MAR AA**
STANDARD OVERNIGHT
 TRK# 8059 4197 8632
 Mstr# 8059 4197 8632 0200 COD IDG ICE ASR
1234567890
XB MCORT FL-US
 MCO

8888 of 8888 **TUE - 25 MAR AA**
STANDARD OVERNIGHT
 TRK# 8059 4197 8240
 Mstr# 8059 4197 8240 0200 COD IDG ICE ASR
1234567890
XB MCORT FL-US
 MCO

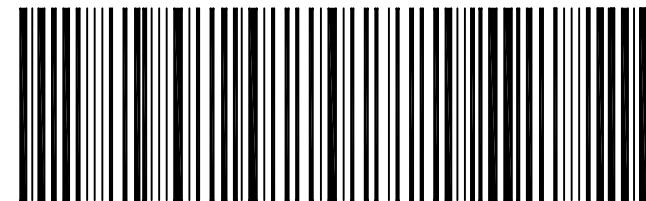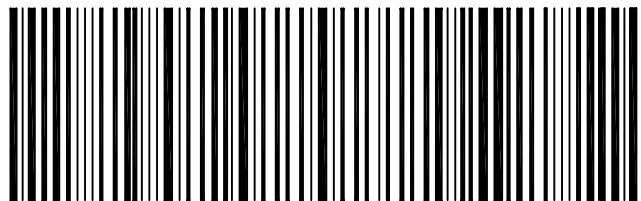

17.625 mm
 33.250 mm
 36.125 mm
 63.500 mm

17.625 mm
 33.250 mm
 36.125 mm
 63.500 mm

US Domestic


4" x 6.75" Thermal Label w/ Bottom Doc Tab


EPL FONTS AND 2D BARCODE

17.825 mm
33.250 mm
36.125 mm
63.500 mm


ORIGIN ID: OLVA (123)456-7890 SHIPPER LINE 1 67890123456789012345 SHIPPER LINE 2 67890123456789012345 STREET ADDRESS LINE 1 3456789012345 STREET ADDRESS LINE 2 3456789012345 CITY1234567890123456 ST 12345 UNITED STATES US	SHIP DATE: 24MAR08 ACTWTG: 12.0 LB MAN SYSTEM#: 1234567/SOFTWARE DIMMED: 12x34x56 IN DRY ICE: 123 LB BILL SENDER
--	---

TO RECIPIENT NAME LINE 1 3456789012345
 RECIPIENT NAME LINE 2 3456789012345
 RECIPIENT STREET ADDRESS LINE 1 345
 RECIPIENT STREET ADDRESS LINE 2 345
 RECIPIENT CITY 67890 ST 12345
 (123)456-7890
REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS
 REF-5: A MAXIMUM OF 48 ALPHA/NUMERIC CHARACTERS



EPL PDF417 350 bytes 24 rows 14 data columns	FedEx Express  REL# 123456789 CLS050107/22/23
--	--

9999 of 9999 **TUE - 25 MAR AA**
TRK# 8059 4197 8632 **STANDARD OVERNIGHT**
Mstr# 8059 4197 8632 0200 **COD IDG ICE ASR**
12345
XB MCORT **FL-US**
MCO

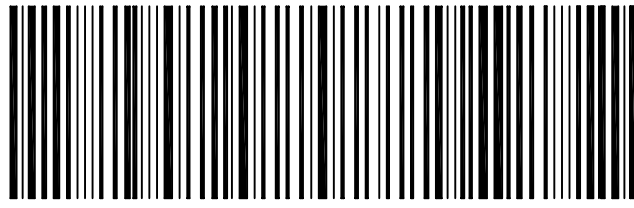


Doc Tab


ZPL FONTS AND 2D BARCODE

17.825 mm
33.250 mm
36.125 mm
150.500 mm
36.125 mm
63.500 mm


ORIGIN ID: OLVA (123)456-7890 SHIPPER LINE 1 67890123456789012345 SHIPPER LINE 2 67890123456789012345 STREET ADDRESS LINE 1 3456789012345 STREET ADDRESS LINE 2 3456789012345 CITY1234567890123456 ST 12345 UNITED STATES US	SHIP DATE: 24MAR08 ACTWTG: 12.0 LB MAN SYSTEM#: 1234567/SOFTWARE DIMMED: 12x34x56 IN DRY ICE: 123 LB BILL SENDER
--	---

TO RECIPIENT NAME LINE 1 AAAAAAAAAAAAAA
 RECIPIENT NAME LINE 2 AAAAAAAAAAAAAA
 RECIPIENT STREET ADDRESS LINE 1 AAA
 RECIPIENT STREET ADDRESS LINE 2 AAA
 RECIPIENT CITY AAAAA, AA 12345
 (123) 456-7890
REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS
 REF-5: A MAXIMUM OF 40 ALPHA/NUMERIC CHARACTERS



ZPL PDF417 350 bytes 23 rows 14 data columns	FedEx Express  REL# 123456789 CLS050107/22/23
--	--

8888 of 8888 **TUE - 25 MAR AA**
TRK# 8059 4197 8240 **STANDARD OVERNIGHT**
Mstr# 8059 4197 8240 0200 **COD IDG ICE ASR**
12345
XB MCORT **FL-US**
MCO

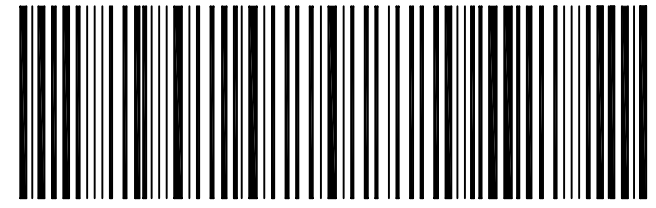

Doc Tab

International - US Origin

4" x 6.75" Thermal Label w/ Bottom Doc Tab

EPL FONTS AND 2D BARCODE

ZPL FONTS AND 2D BARCODE

17.625 mm
33.250 mm
36.125 mm
63.500 mm

ORIGIN ID: OLVA (123)456-7890 SHIPPER LINE 1 67890123456789012345 SHIPPER LINE 2 67890123456789012345 STREET ADDRESS LINE 1 3456789012345 STREET ADDRESS LINE 2 3456789012345 CITY1234567890123456 ST 12345 UNITED STATES US	SHIP DATE: 24MAR08 ACTWGT: 12.0 LB MAN SYSTEM#: 1234567/SOFTWARE DIMMED: 12x34x56 IN DRY ICE: 123 LB BILL SENDER NO EEI 38.37(f)
--	--

ORIGIN ID: OLVA (123)456-7890 SHIPPER LINE 1 67890123456789012345 SHIPPER LINE 2 67890123456789012345 STREET ADDRESS LINE 1 3456789012345 STREET ADDRESS LINE 2 3456789012345 CITY1234567890123456 ST 12345 UNITED STATES US	SHIP DATE: 24MAR08 ACTWGT: 12.0 LB MAN SYSTEM#: 1234567/SOFTWARE DIMMED: 12x34x56 IN DRY ICE: 123 LB BILL SENDER NO EEI 38.37(f)
--	--

TO RECIPIENT NAME LINE 1 3456789012345
 RECIPIENT NAME LINE 2 3456789012345
 RECIPIENT STREET ADDRESS LINE 1 345
 RECIPIENT STREET ADDRESS LINE 2 345
 RECIPIENT CITY 67890 ST 12345-789 (BR)
 (123)456-7890

REF-5: A MAXIMUM OF 48 ALPHA/NUMERIC CHARACTERS
 REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS

TO RECIPIENT NAME LINE 1 AAAAAAAAAAAAAA
 RECIPIENT NAME LINE 2 AAAAAAAAAAAAAA
 RECIPIENT STREET ADDRESS LINE 1 AAA
 RECIPIENT STREET ADDRESS LINE 2 AAA
 RECIPIENT CITY AAAAA, AA 12345-789 (BR)
 (123) 456-7890

REF-5: A MAXIMUM OF 40 ALPHA/NUMERIC CHARACTERS
 REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS

EPL PDF417

291 bytes

21 rows

14 data columns

CLS050107/22/23

ZPL PDF417

291 bytes

20 rows

14 data columns

CLS050107/22/23

These commodities, technology, or software were exported from the United States in accordance with the export administration regulations. Diversion contrary to US law is prohibited.

REL# 123456789

These commodities, technology, or software were exported from the United States in accordance with the export administration regulations. Diversion contrary to US law is prohibited.

REL# 123456789

9999 of 9999 TUE - 25 MAR AA

TRK# 8059 4197 8632 STANDARD OVERNIGHT

Mstr# 8059 4197 8632 0200 COD IDG ICE ASR

1234567890

FL-US

XB MCORT MCO

8888 of 8888 TUE - 25 MAR AA



TRK# 8059 4197 8240 STANDARD OVERNIGHT

Mstr# 8059 4197 8240 0200 COD IDG ICE ASR

1234567890

FL-US

XB MCORT MCO

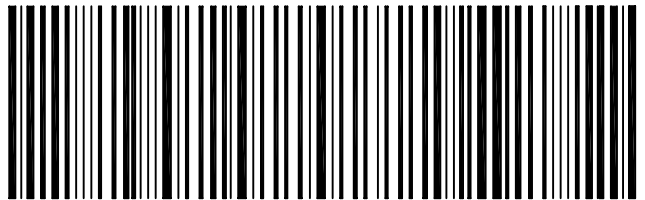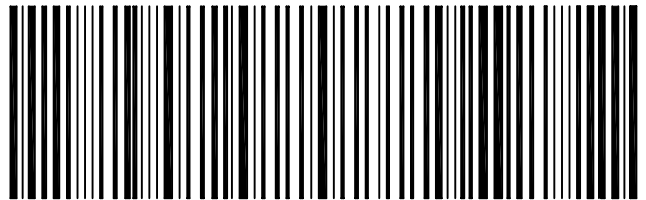

Doc Tab

Doc Tab

17.625 mm
33.250 mm
36.125 mm
150.500 mm
63.500 mm

International - Non US Origin

4" x 6.75" Thermal Label w/ Bottom Doc Tab

EPL FONTS AND 2D BARCODE

17.625 mm

33.250 mm

36.125 mm

63.500 mm

ORIGIN ID: OLVA (123)456-7890 SHIPPER LINE 1 67890123456789012345 SHIPPER LINE 2 67890123456789012345 STREET ADDRESS LINE 1 3456789012345 STREET ADDRESS LINE 2 3456789012345 CITY1234567890123456 ST 12345 UNITED STATES US	SHIP DATE: 24MAR08 ACTWGT: 12.0 LB MAN SYSTEM#: 1234567/SOFTWARE DIMMED: 12x34x56 IN DRY ICE: 123 LB BILL SENDER NO EEI 38.37(f)
--	--

TO RECIPIENT NAME LINE 1 3456789012345
 RECIPIENT NAME LINE 2 3456789012345
 RECIPIENT STREET ADDRESS LINE 1 345
 RECIPIENT STREET ADDRESS LINE 2 345
 RECIPIENT CITY 67890 ST 12345-789 (BR)
 (123)456-7890

REF-5: A MAXIMUM OF 48 ALPHA/NUMERIC CHARACTERS
 REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS

EPL PDF417

446 bytes

29 rows

14 data columns

REL#
123456789

9999 of 9999

TRK# 8059 4197 8632

Mstr# 8059 4197 8632 0200

TUE - 25 MAR AA

STANDARD OVERNIGHT

COD IDG ICE ASR

1234567890

FL-US

MCO

Doc Tab

ZPL FONTS AND 2D BARCODE

17.625 mm

33.250 mm

36.125 mm

63.500 mm

ORIGIN ID: OLVA (123)456-7890 SHIPPER LINE 1 67890123456789012345 SHIPPER LINE 2 67890123456789012345 STREET ADDRESS LINE 1 3456789012345 STREET ADDRESS LINE 2 3456789012345 CITY1234567890123456 ST 12345 UNITED STATES US	SHIP DATE: 24MAR08 ACTWGT: 12.0 LB MAN SYSTEM#: 1234567/SOFTWARE DIMMED: 12x34x56 IN DRY ICE: 123 LB BILL SENDER NO EEI 38.37(f)
--	--

TO RECIPIENT NAME LINE 1 AAAAAAAAAAAAAA
 RECIPIENT NAME LINE 2 AAAAAAAAAAAAAA
 RECIPIENT STREET ADDRESS LINE 1 AAA
 RECIPIENT STREET ADDRESS LINE 2 AAA
 RECIPIENT CITY AAAAA, AA 12345-789 (BR)
 (123) 456-7890

REF-5: A MAXIMUM OF 40 ALPHA/NUMERIC CHARACTERS
 REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS

ZPL PDF417

446 bytes

27 rows

14 data columns

REL#
123456789

8888 of 8888

TRK# 8059 4197 8240

Mstr# 8059 4197 8240 0200

TUE - 25 MAR AA

STANDARD OVERNIGHT

COD IDG ICE ASR

1234567890

FL-US

MCO

Doc Tab

US Domestic 4" x 6" Thermal Label

EPL FONTS AND 2D BARCODE

ZPL FONTS AND 2D BARCODE

ORIGIN ID: OLVA (123)456-7890
 SHIPPER LINE 1 67890123456789012345
 SHIPPER LINE 2 67890123456789012345
 STREET ADDRESS LINE 1 3456789012345
 STREET ADDRESS LINE 2 3456789012345
 CITY1234567890123456 ST 12345
 UNITED STATES US

SHIP DATE: 24MAR08
 ACTWGT: 12.0 LB MAN
 SYSTEM#: 12345677/SOFTWARE
 DIMMED: 12x34x56 IN
 DRY ICE: 123 LB
 BILL SENDER

TO RECIPIENT NAME LINE 1 3456789012345
 RECIPIENT NAME LINE 2 3456789012345
 RECIPIENT STREET ADDRESS LINE 1 345
 RECIPIENT STREET ADDRESS LINE 2 345
 RECIPIENT CITY 67890 ST 12345

(123)456-7890 REF-5: A MAXIMUM OF 40 ALPHA/NUMERIC CHARACTERS
 REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS

EPL PDF417
 350 bytes
 24 rows
 14 data columns

FedEx
Express

REL# 123456789

9999 of 9999 TUE - 25 MAR AA
TRK# 8059 4197 8632 STANDARD OVERNIGHT
 Mstr# 8059 4197 8632 0200 COD IDG ICE ASR
 12345
XB MCORT FL-US
 MCO

ORIGIN ID: OLVA (123)456-7890
 SHIPPER LINE 1 67890123456789012345
 SHIPPER LINE 2 67890123456789012345
 STREET ADDRESS LINE 1 3456789012345
 STREET ADDRESS LINE 2 3456789012345
 CITY1234567890123456 ST 12345
 UNITED STATES US

SHIP DATE: 24MAR08
 ACTWGT: 12.0 LB MAN
 SYSTEM#: 12345677/SOFTWARE
 DIMMED: 12x34x56 IN
 DRY ICE: 123 LB
 BILL SENDER

TO RECIPIENT NAME LINE 1 AAAAAAAAAAAAAA
 RECIPIENT NAME LINE 2 AAAAAAAAAAAAAA
 RECIPIENT STREET ADDRESS LINE 1 AAA
 RECIPIENT STREET ADDRESS LINE 2 AAA
 RECIPIENT CITY AAAAA, AA 12345

(123) 456-7890 REF-5: A MAXIMUM OF 40 ALPHA/NUMERIC CHARACTERS
 REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS

ZPL PDF417
 350 bytes
 23 rows
 14 data columns

FedEx
Express

REL# 123456789

8888 of 8888 TUE - 25 MAR AA
TRK# 8059 4197 8240 STANDARD OVERNIGHT
 Mstr# 8059 4197 8240 0200 COD IDG ICE ASR
 12345
XB MCORT FL-US
 MCO

International - US Origin

4" x 6" Thermal Label

EPL FONTS AND 2D BARCODE

ZPL FONTS AND 2D BARCODE

17.625 mm
33.250 mm
36.125 mm
63.500 mm

ORIGIN ID: OLVA (123)456-7890 SHIPPER LINE 1 67890123456789012345 SHIPPER LINE 2 67890123456789012345 STREET ADDRESS LINE 1 3456789012345 STREET ADDRESS LINE 2 3456789012345 CITY1234567890123456 ST 12345 UNITED STATES US	SHIP DATE: 24MAR08 ACTWGT: 12.0 LB MAN SYSTEM#: 12345677/SOFTWARE DIMMED: 12x34x56 IN DRY ICE: 123 LB BILL SENDER NO EEZ 38.37(f)
--	---

TO RECIPIENT NAME LINE 1 3456789012345
 RECIPIENT NAME LINE 2 3456789012345
 RECIPIENT STREET ADDRESS LINE 1 345
 RECIPIENT STREET ADDRESS LINE 2 345
 RECIPIENT CITY 67890 ST 12345-789 (BR)

(123)456-7890 REF-5: A MAXIMUM OF 40 ALPHA/NUMERIC CHARACTERS
 REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS

	EPL PDF417 291 bytes 21 rows 14 data columns		FedEx Express 
---	---	---	---

CL5090107/22/23

These commodities, technology, or software were exported from the United States in accordance with the export administration regulations. Diversion contrary to US law is prohibited. REL# 123456789

9999 of 9999 TUE - 25 MAR AA
 TRK# 8059 4197 8632 STANDARD OVERNIGHT
 Mstr# 8059 4197 8632 0200 COD IDG ICE ASR
 1234567890
 XB MCORT FL-US
 MCO



17.625 mm
33.250 mm
36.125 mm
150.500 mm
63.500 mm

ORIGIN ID: OLVA (123)456-7890 SHIPPER LINE 1 67890123456789012345 SHIPPER LINE 2 67890123456789012345 STREET ADDRESS LINE 1 3456789012345 STREET ADDRESS LINE 2 3456789012345 CITY1234567890123456 ST 12345 UNITED STATES US	SHIP DATE: 24MAR08 ACTWGT: 12.0 LB MAN SYSTEM#: 12345677/SOFTWARE DIMMED: 12x34x56 IN DRY ICE: 123 LB BILL SENDER NO EEZ 38.37(f)
--	---

TO RECIPIENT NAME LINE 1 AAAAAAAAAAAAAA
 RECIPIENT NAME LINE 2 AAAAAAAAAAAAAA
 RECIPIENT STREET ADDRESS LINE 1 AAA
 RECIPIENT STREET ADDRESS LINE 2 AAA
 RECIPIENT CITY AAAAA, AA 12345-789 (BR)

(123) 456-7890 REF-5: A MAXIMUM OF 40 ALPHA/NUMERIC CHARACTERS
 REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS

	ZPL PDF417 291 bytes 20 rows 14 data columns		FedEx Express 
---	---	---	---

CL5090107/22/23

These commodities, technology, or software were exported from the United States in accordance with the export administration regulations. Diversion contrary to US law is prohibited. REL# 123456789

8888 of 8888 TUE - 25 MAR AA
 TRK# 8059 4197 8240 STANDARD OVERNIGHT
 Mstr# 8059 4197 8240 0200 COD IDG ICE ASR
 1234567890
 XB MCORT FL-US
 MCO



International - Non US Origin

4" x 6" Thermal Label

EPL FONTS AND 2D BARCODE

ZPL FONTS AND 2D BARCODE

17.625 mm

33.250 mm

36.125 mm

63.500 mm


ORIGIN ID: OLVA (123)456-7890 SHIPPER LINE 1 67890123456789012345 SHIPPER LINE 2 67890123456789012345 STREET ADDRESS LINE 1 3456789012345 STREET ADDRESS LINE 2 3456789012345 CITY1234567890123456 ST 12345 UNITED STATES US	SHIP DATE: 24MAR08 ACTWGT: 12.0 LB MAN SYSTEM#: 12345677/SOFTWARE DIMMED: 12x34x56 IN DRY ICE: 123 LB BILL SENDER NO EEZ 38.37(f)
--	---

TO RECIPIENT NAME LINE 1 3456789012345
 RECIPIENT NAME LINE 2 3456789012345
 RECIPIENT STREET ADDRESS LINE 1 345
 RECIPIENT STREET ADDRESS LINE 2 345
 RECIPIENT CITY 67890 ST 12345-789 (BR)
 (123)456-7890

REF-5: A MAXIMUM OF 40 ALPHA/NUMERIC CHARACTERS
 REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS

FedEx
Express

EPL PDF417
446 bytes
29 rows
14 data columns



CL5090107/22/23


REL#
123456789

9999 of 9999 TUE - 25 MAR AA

TRK# 8059 4197 8632 STANDARD OVERNIGHT
 Mstr# 8059 4197 8632 0200 COD IDG ICE ASR

1234567890

XB MCORT FL-US
MCO

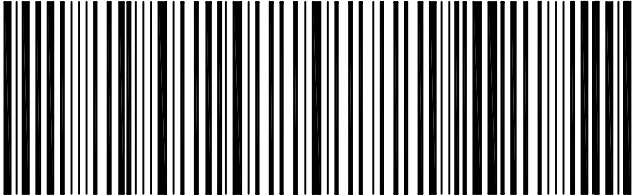

17.625 mm

33.250 mm

36.125 mm

63.500 mm


ORIGIN ID: OLVA (123)456-7890 SHIPPER LINE 1 67890123456789012345 SHIPPER LINE 2 67890123456789012345 STREET ADDRESS LINE 1 3456789012345 STREET ADDRESS LINE 2 3456789012345 CITY1234567890123456 ST 12345 UNITED STATES US	SHIP DATE: 24MAR08 ACTWGT: 12.0 LB MAN SYSTEM#: 12345677/SOFTWARE DIMMED: 12x34x56 IN DRY ICE: 123 LB BILL SENDER NO EEZ 38.37(f)
--	---

TO RECIPIENT NAME LINE 1 AAAAAAAAAAAAAA
 RECIPIENT NAME LINE 2 AAAAAAAAAAAAAA
 RECIPIENT STREET ADDRESS LINE 1 AAA
 RECIPIENT STREET ADDRESS LINE 2 AAA
 RECIPIENT CITY AAAAA, AA 12345-789 (BR)
 (123) 456-7890

REF-5: A MAXIMUM OF 40 ALPHA/NUMERIC CHARACTERS
 REF-3: A MAXIMUM OF THIRTY CHARACTERS REF-4: A MAXIMUM OF THIRTY CHARACTERS
 REF-1: A MAXIMUM OF THIRTY CHARACTERS REF-2: A MAXIMUM OF THIRTY CHARACTERS

FedEx
Express

ZPL PDF417
446 bytes
27 rows
14 data columns



CL5090107/22/23


REL#
123456789

8888 of 8888 TUE - 25 MAR AA


TRK# 8059 4197 8240 STANDARD OVERNIGHT
 Mstr# 8059 4197 8240 0200 COD IDG ICE ASR

1234567890


XB MCORT FL-US
MCO

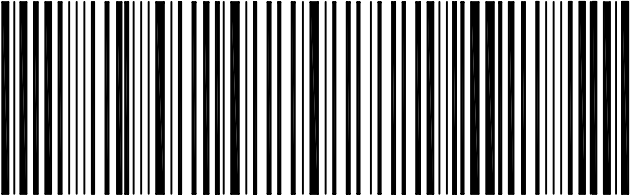

Express CLS Thermal Label Element Numbers

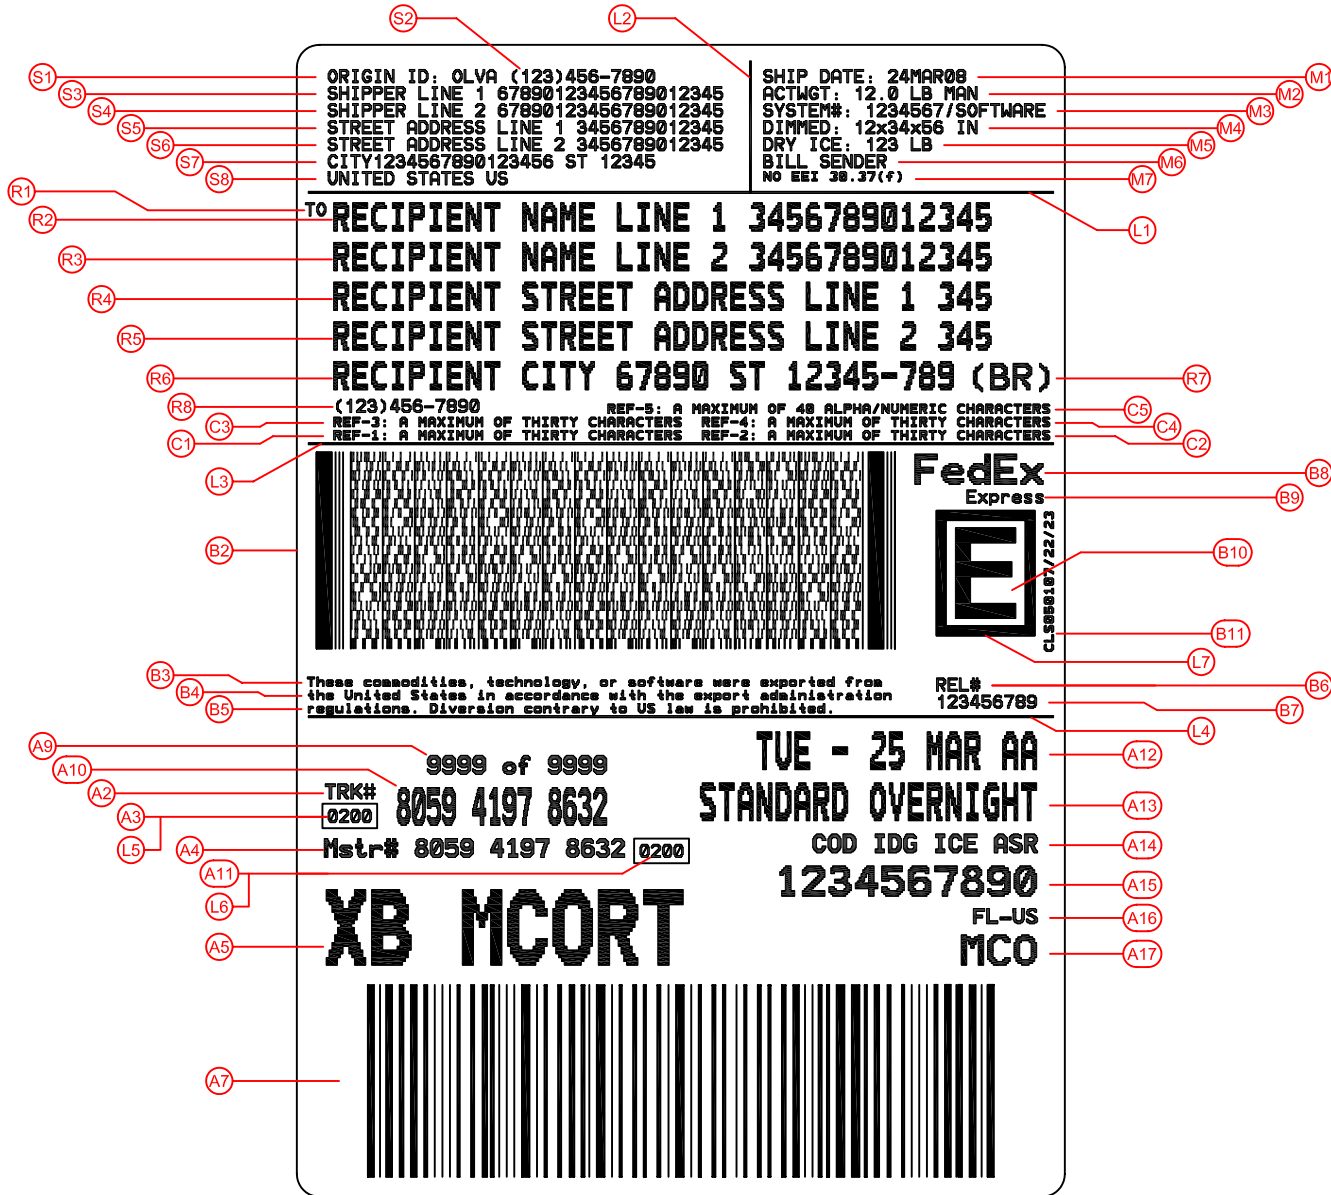

Express CLS Thermal Label Element Numbers

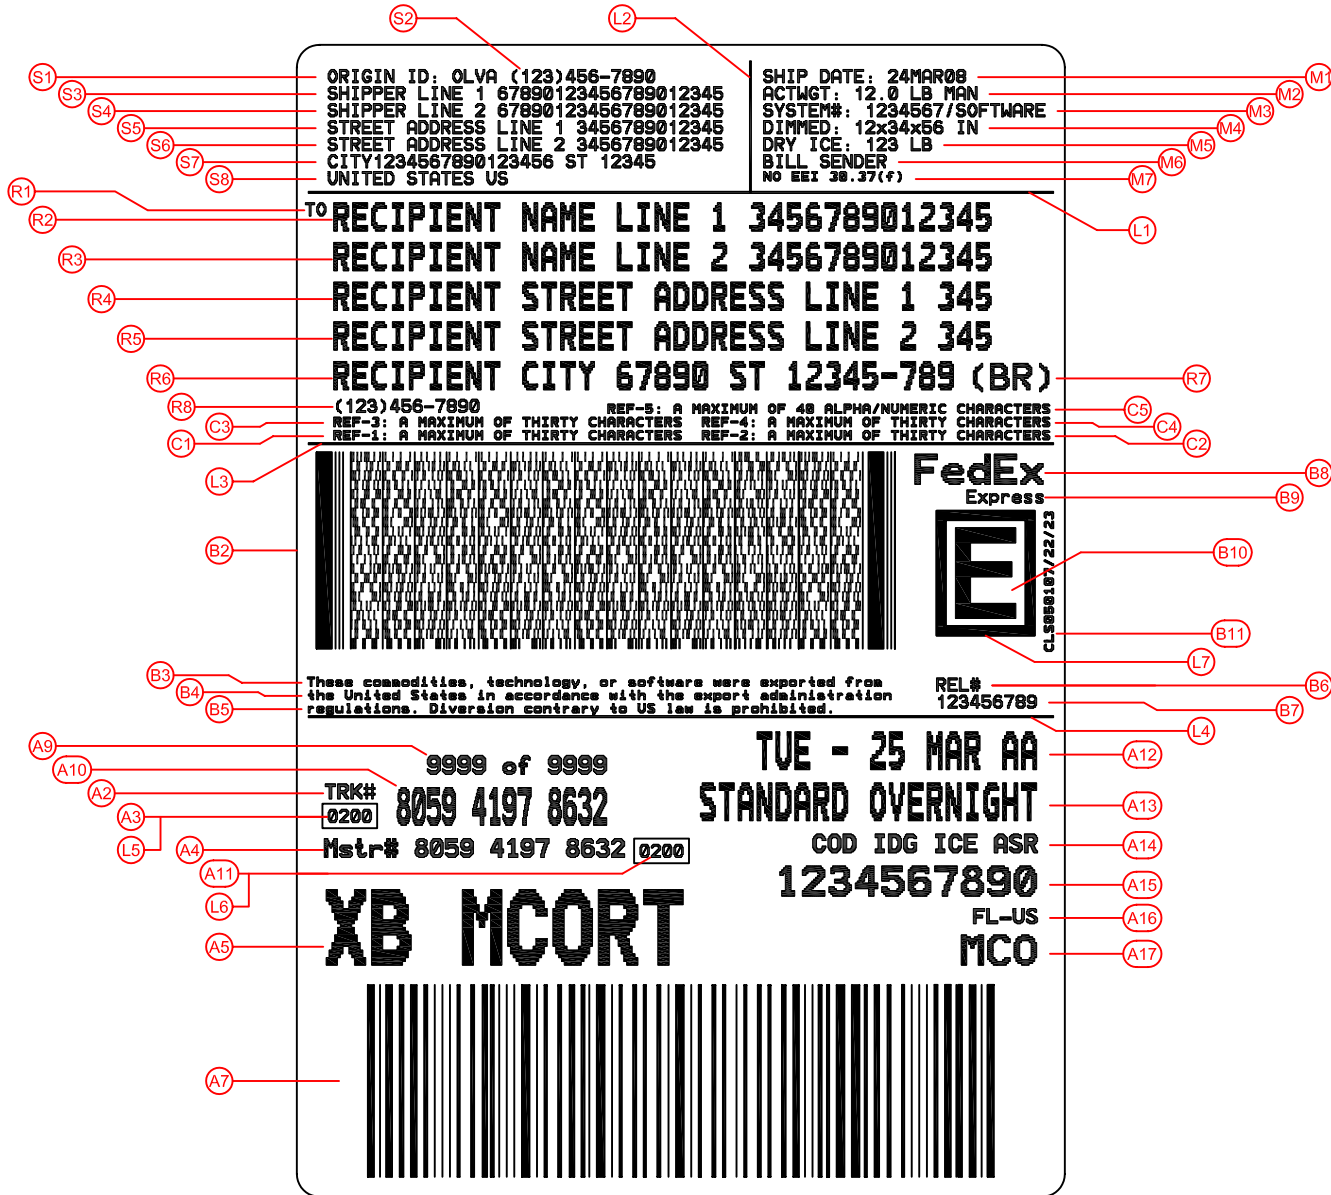

Express CLS Thermal Label Element Characteristics

Block: Shipper

Element Number	Description	Format	Case	Length	Domestic US	Intl US Origin	Intl non-US Origin	Insertion Point Coordinates ⁽¹⁾				EPL Characters			ZPL Characters		
								(mm)		(dots)		Font Name	Multiplier		Font Name	Height (dots)	Width (dots)
								X	Y	X	Y		Horizontal	Vertical			
S1	Origin ID Tag and Data	AN	U	-	X	X	X	4.000	1.250	32	10	2	1	1	d	0	0
S2	Shipper Phone Number	N	-	4	X	X	X	28.000	1.250	224	10	2	1	1	d	0	0
S3	Shipper Name Line 1	AN	U	35	X	X	X	4.000	3.500	32	28	2	1	1	d	0	0
S4	Shipper Name Line 2	AN	U	35	X	X	X	4.000	5.750	32	46	2	1	1	d	0	0
S5	Shipper Street Address Line 1	AN	U	35	X	X	X	4.000	8.000	32	64	2	1	1	d	0	0
S6	Shipper Street Address Line 2	AN	U	35	X	X	X	4.000	10.250	32	82	2	1	1	d	0	0
S7	Shipper City, State, Postal Code	AN	U	35	X	X	X	4.000	12.500	32	100	2	1	1	d	0	0
S8	Shipper Country OR Sign Field	AN	U	20	X	X	X	4.000	14.750	32	118	2	1	1	d	0	0

Block: Miscellaneous

Element Number	Description	Format	Case	Length	Domestic US	Intl US Origin	Intl non-US Origin	Insertion Point Coordinates ⁽¹⁾				EPL Characters			ZPL Characters		
								(mm)		(dots)		Font Name	Multiplier		Font Name	Height (dots)	Width (dots)
								X	Y	X	Y		Horizontal	Vertical			
M1	"SHIP DATE:" Tag and Data	AN	U		X	X	X	61.625	1.250	493	10	2	1	1	d	0	0
M2	"ACTWGT:" Tag, Data and Unit of Measure	AN	U		X	X	X	61.625	3.500	493	28	2	1	1	d	0	0
M3	"SYSTEM#:" Tag and Data	AN	U		X	X	X	61.625	5.750	493	46	2	1	1	d	0	0
M4	"DIMMED:" Tag, Data and Unit of Measure	AN	M		X	X	X	61.625	8.000	493	64	2	1	1	d	0	0
M5	"DRY ICE:" Tag, Data and Unit of Measure	AN	U		X	X	X	61.625	10.250	493	82	2	1	1	d	0	0
M6	"BILL SENDER", "BILL RECIPIENT", "BILL THIRD PARTY"	A	U		X	X	X	61.625	12.500	493	100	2	1	1	d	0	0
M7	NO EEI 30.nn(a)	AN	M				X	61.625	14.750	493	118	1	1	1	0	13	13

Notes

- (1) Insertion point coordinate datum is the intersection of the top and left edges of the 4"x6.75" label w/ bottom doc tab.
 For 4"x6.75" label w/ top doc tab, increment element Y values by 164 dots or use the Set Reference Point command to shift the datum 0X,164Y dots.
 For 4"x6" label, increment element Y values by 15 dots or use the Set Reference Point command to shift the datum 0X,15Y dots.

Format Definition

- A = alpha characters only
- N = numeric characters only
- AN = alpha and numeric characters

Case Definition

- U = Upper case characters only
- L = Lower case characters only
- M = Mixed case, upper and lower case allowed

Express CLS Thermal Label Element Characteristics

Block: Recipient

Element Number	Description	Format	Case	Length	Domestic US	Intl US Origin	Intl non-US Origin	Insertion Point Coordinates ⁽¹⁾				EPL Characters			ZPL Characters		
								(mm)		(dots)		Font Name	Multiplier		Font Name	Height (dots)	Width (dots)
								X	Y	X	Y		Horizontal	Vertical			
								X	Y	X	Y	Name	Horizontal	Vertical	Name	Height (dots)	Width (dots)
R1	Tag "TO"	A	U	-	X	X	X	1.000	18.875	8	151	2	1	1	0	21	21
R2	Recipient Name Line 1	AN	U	35	X	X	X	4.625	18.625	37	149	1	2	3	0	38	38
R3	Recipient Name Line 2	AN	U	35	X	X	X	4.625	23.875	37	191	1	2	3	0	38	38
R4	Recipient Street Address Line 1	AN	U	35	X	X	X	4.625	29.125	37	233	1	2	3	0	38	38
R5	Recipient Street Address Line 2	AN	U	35	X	X	X	4.625	34.375	37	275	1	2	3	0	38	38
R6	Recipient City, State, Postal Code	AN	U	20	X	X	X	4.625	39.625	37	317	1	2	3	0	43	40
R7	Recipient Country "(AA)"	A	U	4		X	X	88.500	40.000	708	320	2	2	2	0	43	40
R8	Recipient Phone Number	N	-		X	X	X	4.375	44.875	35	359	2	1	1	0	21	21

Block: Customer Reference

Element Number	Description	Format	Case	Length	Domestic US	Intl US Origin	Intl non-US Origin	Insertion Point Coordinates ⁽¹⁾				EPL Characters			ZPL Characters		
								(mm)		(dots)		Font Name	Multiplier		Font Name	Height (dots)	Width (dots)
								X	Y	X	Y		Horizontal	Vertical			
								X	Y	X	Y	Name	Horizontal	Vertical	Name	Height (dots)	Width (dots)
C5	Reference Field 5 Tag and Data	AN	M	40	X	X	X	41.000	45.500	328	364	1	1	1	0	13	13
C4	Reference Field 4 Tag and Data	AN	M	30	X	X	X	53.500	47.250	428	378	1	1	1	0	13	13
C3	Reference Field 3 Tag and Data	AN	M	30	X	X	X	4.750	47.250	38	378	1	1	1	0	13	13
C2	Reference Field 2 Tag and Data	AN	M	30	X	X	X	53.500	49.000	428	392	1	1	1	0	13	13
C1	Reference Field 1 Tag and Data	AN	M	30	X	X	X	4.750	49.000	38	392	1	1	1	0	13	13

Notes

- (1) Insertion point coordinate datum is the intersection of the top and left edges of the 4"x6.75" label w/ bottom doc tab.
 For 4"x6.75" label w/ top doc tab, increment element Y values by 164 dots or use the Set Reference Point command to shift the datum 0X,164Y dots.
 For 4"x6" label, increment element Y values by 15 dots or use the Set Reference Point command to shift the datum 0X,15Y dots.

Format Definition

A = alpha characters only
 N = numeric characters only
 AN = alpha and numeric characters

Case Definition

U = Upper case characters only
 L = Lower case characters only
 M = Mixed case, upper and lower case allowed

Express CLS Thermal Label Element Characteristics

Block: 2D Barcode and Branding Elements

Element Number	Description	Format	Case	Length	Domestic US	Intl US Origin	Intl non-US Origin	Insertion Point Coordinates ⁽¹⁾				EPL Characters			ZPL Characters		
								(mm)		(dots)		Font Name	Multiplier		Font Name	Height (dots)	Width (dots)
								X	Y	X	Y		Horizontal	Vertical			
B1	Delivery Address Barcode (Height = 25 dots)	-	-	-	X			2.625	52.000	21	416	n/a	n/a	n/a	n/a	n/a	n/a
B2	⁽²⁾ PDF417 Barcode (max column count = 14)	-	-	-	X			2.625	56.125	21	449	n/a	n/a	n/a	n/a	n/a	n/a
B2	⁽²⁾ PDF417 Barcode (max column count = 14)	-	-	-		X	X	2.625	52.000	21	416	n/a	n/a	n/a	n/a	n/a	n/a
B3	ARI Statement Line 1	A	M	-		X		1.250	81.625	10	653	1	1	1	0	13	13
	"These commodities, technology, or software were exported from"									0	0						
B4	ARI Statement Line 2	A	M	-		X		1.250	83.375	10	667	1	1	1	0	13	13
	"the United States in accordance with the export administration"									0	0						
B5	ARI Statement Line 3	A	M	-		X		1.250	85.125	10	681	1	1	1	0	13	13
	"regulations. Diversion contrary to US law is prohibited."									0	0						
B6	Tag "REL#"	A	U	-	X	X	X	84.500	81.750	676	654	2	1	1	0	19	26
B7	Release Number	N	-	9	X	X	X	84.500	84.000	676	672	2	1	1	0	19	26
B8	"FedEx"	A	M	-	X			81.500	56.125	652	449	3	2	2	0	43	58
B9	Op-Co Name "Express"	A	M	-	X			88.500	61.000	708	488	2	1	1	0	19	26
B10	Op-Co identifier "E"	A	U	-	X			87.125	66.125	697	529	5	2	2	0	128	137
B11	⁽³⁾ CLS Version Identifier	AN	U	15	X			98.750	82.625	790	661	1	1	1	0	13	18
B8	"FedEx"	A	M	-		X	X	81.500	52.000	652	416	3	2	2	0	43	58
B9	Op-Co Name "Express"	A	M	-		X	X	88.500	56.875	708	455	2	1	1	0	19	26
B10	Op-Co identifier "E"	A	U	-		X	X	87.125	62.000	697	496	5	2	2	0	128	137
B11	⁽³⁾ CLS Version Identifier	AN	U	15		X	X	98.750	78.500	790	628	1	1	1	0	13	18

Notes

- (1) Insertion point coordinate datum is the intersection of the top and left edges of the 4"x6.75" label w/ bottom doc tab.
For 4"x6.75" label w/ top doc tab, increment element Y values by 164 dots or use the Set Reference Point command to shift the datum 0X,164Y dots.
For 4"x6" label, increment element Y values by 15 dots or use the Set Reference Point command to shift the datum 0X,15Y dots.
- (2) PDF417 Barcode max column count = 14
- (3) Element B11 is rotated 90 degrees CCW.

Format Definition

A = alpha characters only
 N = numeric characters only
 AN = alpha and numeric characters

Case Definition

U = Upper case characters only
 L = Lower case characters only
 M = Mixed case, upper and lower case allowed

Express CLS Thermal Label Element Characteristics

Block: **ASTRA** (Refer to ASTRA 4.0 Specification for more detail. Refer to this specification for element insertion points and font characteristics.)

Element Number	Description	Format	Case	Length	Domestic US	Intl US Origin	Intl non-US Origin	Insertion Point Coordinates ⁽¹⁾				EPL Characters			ZPL Characters		
								(mm)		(dots)		Font Name	Multiplier		Font Name	Height (dots)	Width (dots)
								X	Y	X	Y		Horizontal	Vertical			
A2	Tag "TRK#", "MPS#", "CRN#"	A	U	4	X	X	X	3.500	95.750	28	766	3	1	1	0	24	24
A3	Form Code	N	-	4	X	X	X	4.000	99.125	32	793	2	1	1	d	0	0
A4	Master Tag and Number (NNNN NNNN NNNN)	AN	M	20	X	X	X	3.500	103.000	28	824	4	1	1	0	27	32
A5	URSA Routing Codes AA AAAAA	AN	U	8	X	X	X	3.500	109.375	28	875	4	3	4	0	107	96
A7	ASTRA Barcode (Height = 203 dots)	-	-	34	X	X	X	9.375	122.375	75	979	n/a	n/a	n/a	n/a	n/a	n/a
A9	Piece Count NNNN of XXXX	AN	L	12		X	X	17.125	92.000	137	736	4	1	1	0	27	36
A10	Tracking Number NNNN NNNN NNNN	N	-	14		X	X	13.125	96.125	105	769	4	1	2	0	53	40
A11	Master Form Code	N	-	4		X	X	45.250	103.750	362	830	2	1	1	d	0	0
A12	⁽⁴⁾ Planned Service Level (Commit Day & Service Area)	AN	U	19		X	X	50.625	88.500	405	708	1	2	4	0	51	41
A13	⁽⁴⁾ Product Name	AN	U	19		X	X	50.625	95.250	405	762	1	2	4	0	51	41
A14	⁽⁴⁾ Special Handling Acronyms	A	U	16		X	X	66.125	102.375	529	819	4	1	1	0	24	26
A15	⁽⁴⁾ Destination Postal Code	N	-	5	X			80.625	106.500	645	852	3	2	2	0	44	44
A15	⁽⁴⁾ Destination Postal Code	AN	U	10		X	X	63.125	106.500	505	852	3	2	2	0	44	44
A16	⁽⁴⁾ Destination State-Country	A	U	5		X	X	89.375	112.250	715	898	3	1	1	0	24	24
A17	⁽⁴⁾ Destination Airport	A	U	3		X	X	87.625	115.625	701	925	3	2	2	0	44	44

Notes

- (1) Insertion point coordinate datum is the intersection of the top and left edges of the 4"x6.75" label w/ bottom doc tab.
 For 4"x6.75" label w/ top doc tab, increment element Y values by 164 dots or use the Set Reference Point command to shift the datum 0X,164Y dots.
 For 4"x6" label, increment element Y values by 15 dots or use the Set Reference Point command to shift the datum 0X,15Y dots.
- (4) Elements A12-A17 appear right justified on the label. Insertion points are for left justified field, which has been padded with leading spaces to max width.

Format Definition

A = alpha characters only
 N = numeric characters only
 AN = alpha and numeric characters

Case Definition

U = Upper case characters only
 L = Lower case characters only
 M = Mixed case, upper and lower case allowed

Express CLS Thermal Label Element Characteristics

Block: Lines

Element Number	Description	Domestic US	Intl US Origin	Intl non-US Origin	Insertion Point Coordinates ⁽¹⁾				Length			
					(mm)		(dots)		(mm)		(dots)	
					X	Y	X	Y	Horizontal	Vertical	Horizontal	Vertical
L1	Horizontal separator between Shipper and Recipient block	X	X	X	1.500	17.375	12	139	98.625	0.250	789	2
L2	Vertical separator between Shipper and Misc block	X	X	X	59.875	1.000	479	8	0.250	16.500	2	132
L3	Horizontal separator between Recipient and 2D block	X	X	X	1.500	50.625	12	405	98.625	0.250	789	2
L4	Horizontal separator between 2D block and ASTRA block	X	X	X	1.500	86.750	12	694	98.625	0.250	789	2
L5	Box surrounding TRK Form Code	X	X	X								
	top line segment				3.250	98.375	26	787	7.125	0.125	57	1
	left line segment				3.250	98.375	26	787	0.125	3.250	1	26
	right line segment				10.375	98.375	83	787	0.125	3.250	1	26
	bottom line segment				3.250	101.625	26	813	7.125	0.125	57	1
L6	Box surrounding Mstr Form Code	X	X	X								
	top line segment				44.500	103.000	356	824	7.125	0.125	57	1
	left line segment				44.500	103.000	356	824	0.125	3.250	1	26
	right line segment				51.625	103.000	413	824	0.125	3.250	1	26
	bottom line segment				44.500	106.250	356	850	7.125	0.125	57	1
L7	Box surrounding Op-Co Identifier	X										
	top line segment				84.625	63.875	677	511	13.000	1.250	104	10
	left line segment				84.625	65.125	677	521	1.250	14.000	10	112
	right line segment				96.375	65.125	771	521	1.250	14.000	10	112
	bottom line segment				84.625	79.125	677	633	13.000	1.250	104	10
L7	Box surrounding Op-Co Identifier		X	X								
	top line segment				84.625	59.750	677	478	13.000	1.250	104	10
	left line segment				84.625	61.000	677	488	1.250	14.000	10	112
	right line segment				96.375	61.000	771	488	1.250	14.000	10	112
	bottom line segment				84.625	75.000	677	600	13.000	1.250	104	10

Notes

- (1) Insertion point coordinate datum is the intersection of the top and left edges of the 4"x6.75" label w/ bottom doc tab.
 For 4"x6.75" label w/ top doc tab, increment element Y values by 164 dots or use the Set Reference Point command to shift the datum 0X,164Y dots.
 For 4"x6" label, increment element Y values by 15 dots or use the Set Reference Point command to shift the datum 0X,15Y dots.